



# Ring

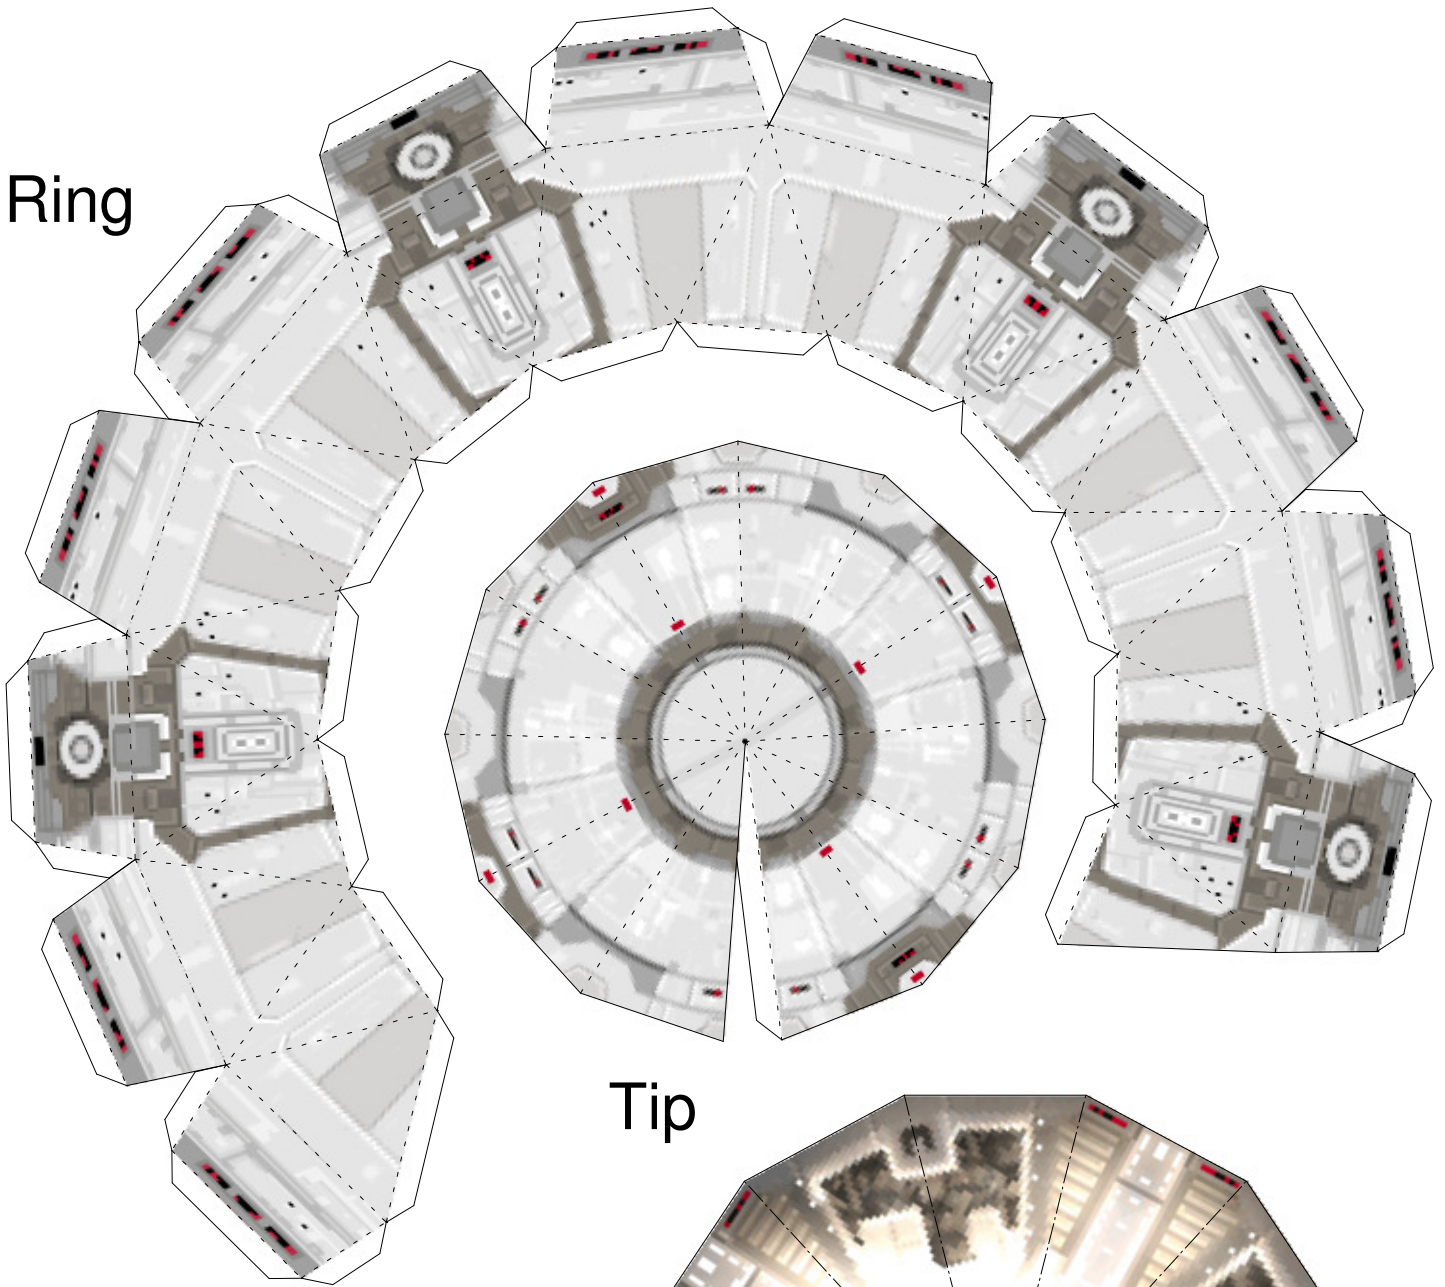

# Tip

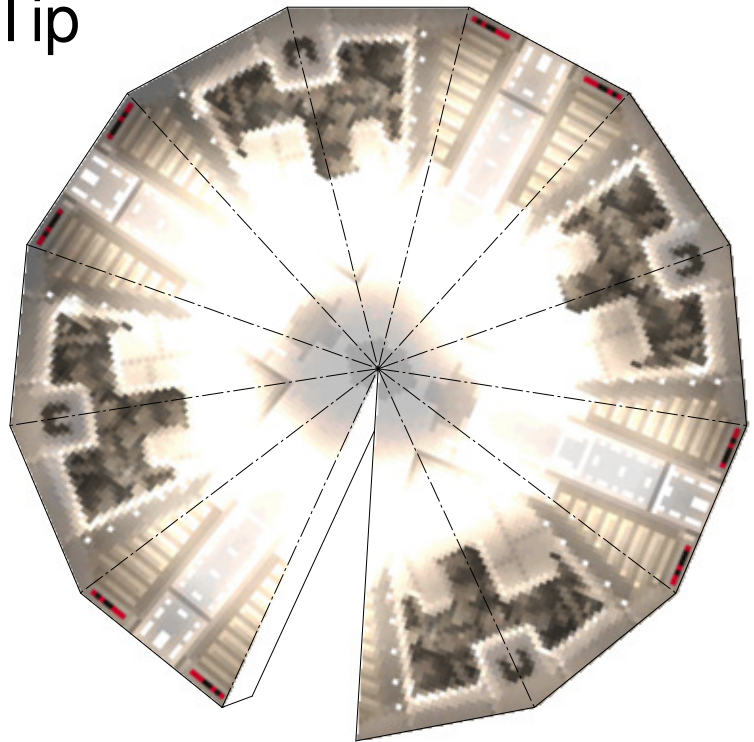

# Hangar


General note: The split lines up the whole way down.

Specific section notes:

Line up the split for the front bulb.


Assemble the ring first,  
then glue the front tip on.

Glue the front hangar in last.

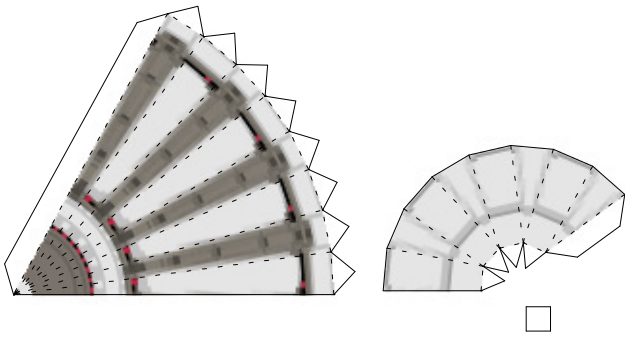


Glue the two pieces together, gluing the tip first.

Tip: Trim the tab on the tip making it taper towards the tip and have it end 1/4 inch before the end.

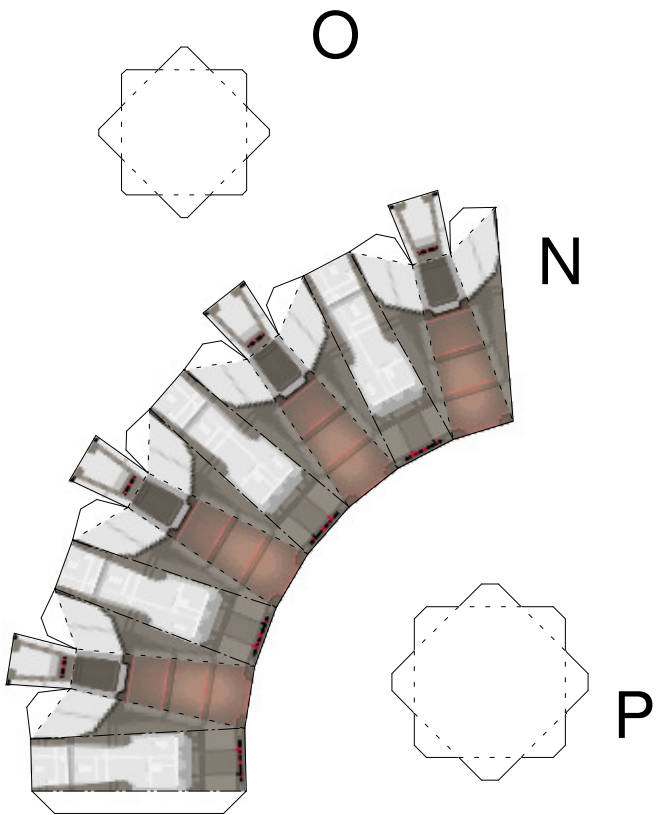

Glue N together, then to O.

Cut a hole in P to adjust it when you glue it to NO.

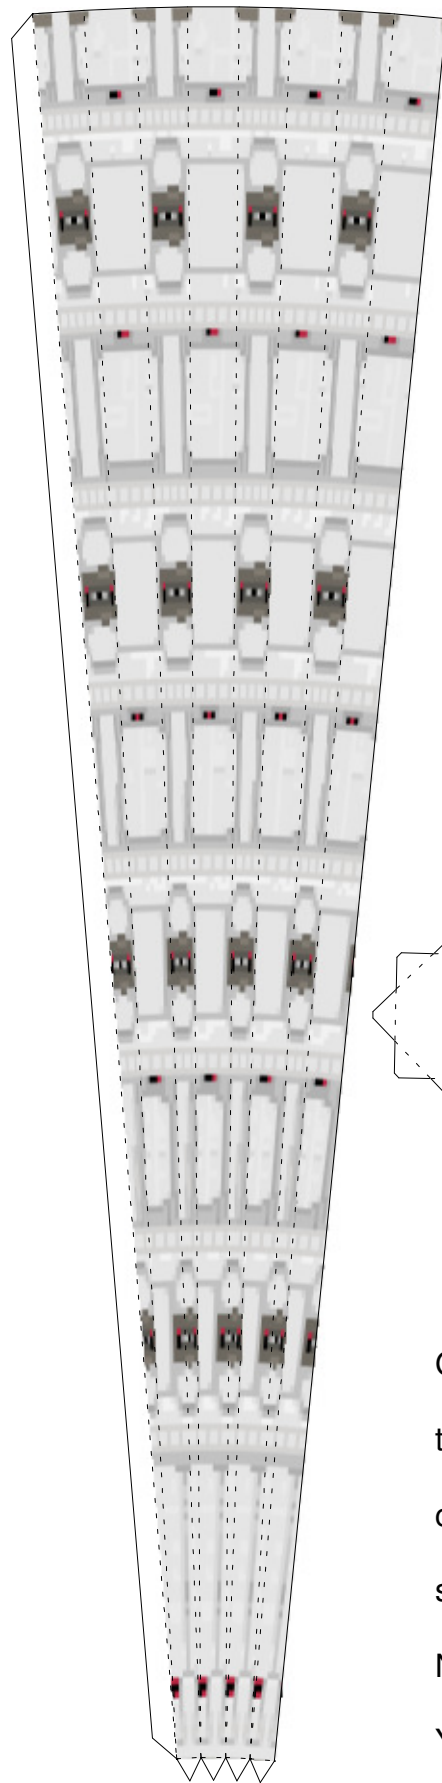


Glue the tail first, then the white support, cutting a hole in it so you can align it.

Note:

You may not need

☐ The squares on the tail sections.

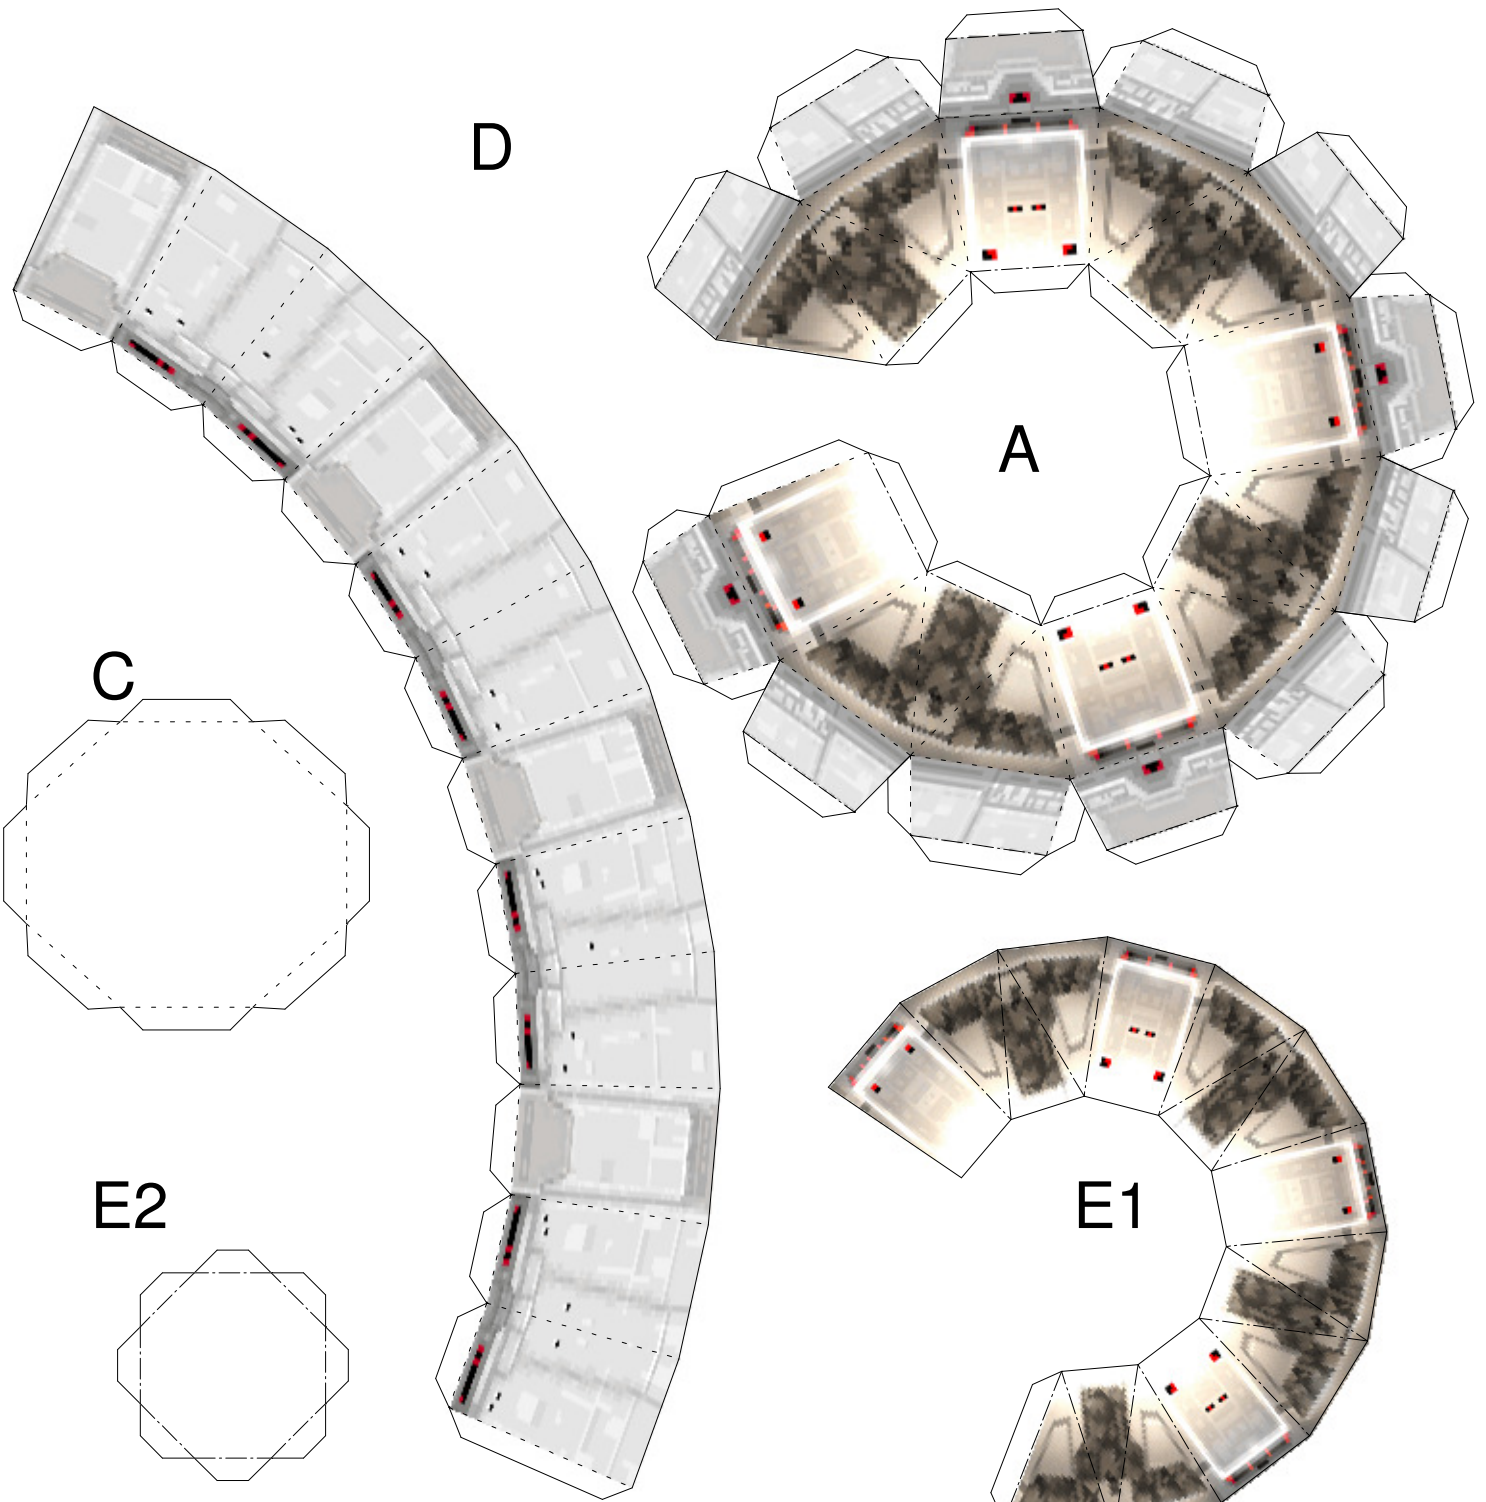








Glue in alphabetical order, cutting a  
hole in C so you can still reach inside.

Glue E1 to E2 before attaching to D.



B



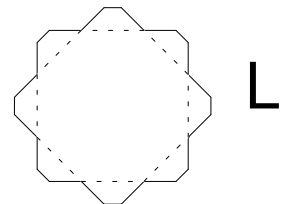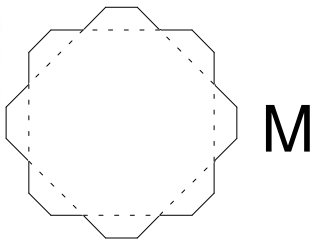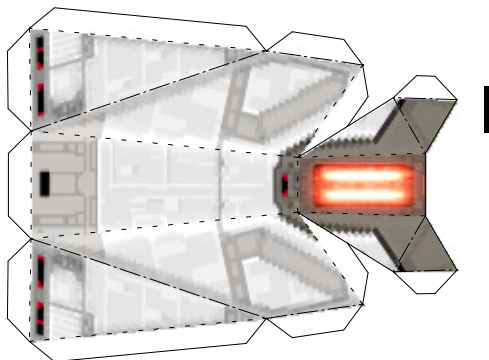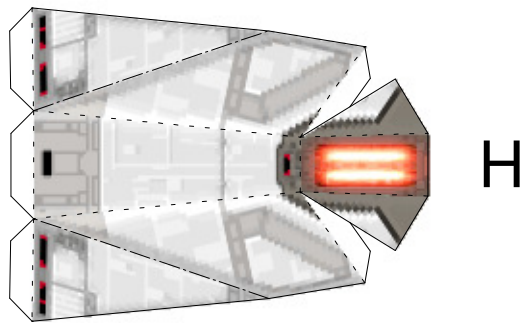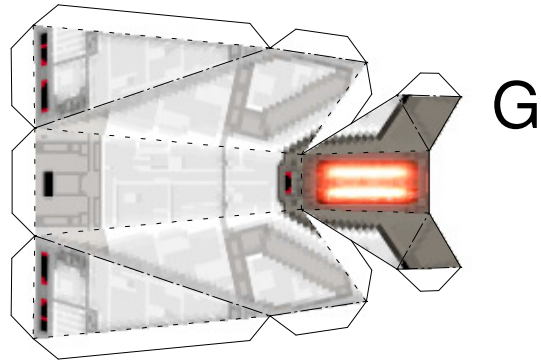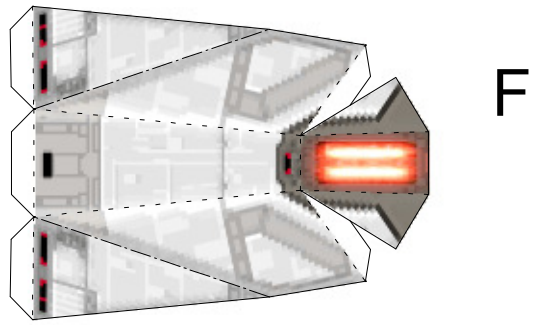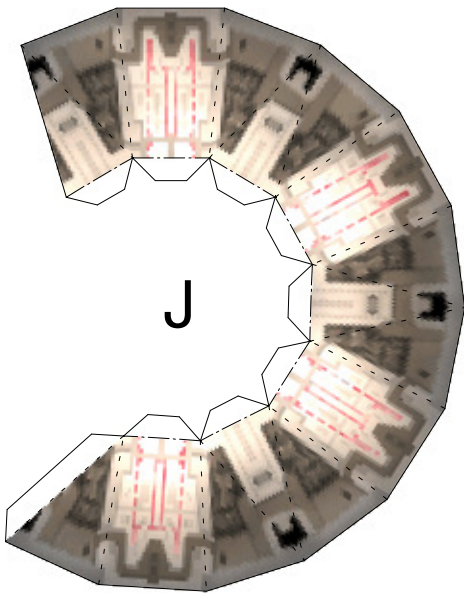

Lightly label parts F and G on the back.

Glue F through I first, then glue J to K.

Glue JK to FGHI with the JK split between F and G.

Glue on L to the other end of FGHI. Finally, cut a hole in M so you can adjust it and glue it to K.